

Monocrystalline JNS60MB 295-310Wp



Tested in extreme weather conditions – resistance to salt spray, frost and hail-proof, resistance to ammonia, dust and sand



PID-resistant and proven hotspot guarantee



Able to handle loads up to 5400Pa



High-transmissive front glass and anti-reflective coating




Highly-efficient cells (mono PERC) for the highest possible yields.



Positive tolerance (-0Wp, +10Wp)



25-year linear performance warranty

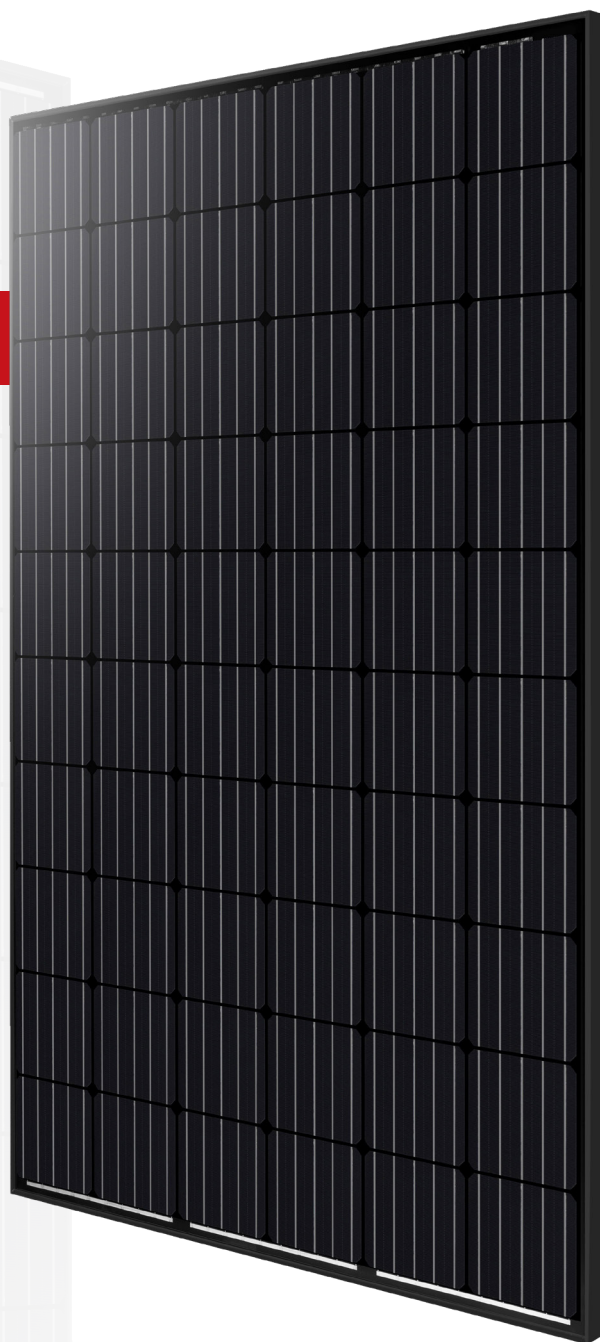

● ● ● Mechanical Support
GERMANY

JNL Solar devote itself to solar power plant developing, operating and maintenance, R&D manufacturing and manufacturer of solar modules, solar cells. JNL Solar equipped professional advanced automatic production line and possessed advanced technique and craftwork. JNL Solar has been involved in investment domestic and international power plan, such as USA, Deutschland, France, Spain, Japan, India, South Africa, South Korea, Canada, etc. and all the power plants are success to on-grid and generating well.

Fiche technique & paramètres

Technical & Electrical data

Peak Power (Pmax)	310	305	300	295
Module Efficiency	18,94%	18,63%	18,33%	18,02%
Max. Power Voltage Vmp (V)	34,22	33,86	33,54	33,16
Max. Power Current Imp (A)	9,06	9,01	8,95	8,9
Open Circuit Voltage Voc (V)	39,72	39,62	39,53	39,42
Short Circuit Current Isc (A)	9,82	9,71	9,6	9,48
Power tolerance	- 0, +10W			
Max System Voltage (V)	DC 1000V			
Number of Bypass Diode	3			
Blown fuse current	15A			

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5
Measuring tolerance: +-3%
Potential Induced Degradation (PID) free, IEC61215, IEC61730,
increased snow load up to 5400Pa.

Méchanical and Operating Parameters

Dimentions	1650 x 992 x 35
Weight (kg)	18,5
Solar Cells Type	156,75mm x 156,75mm (5BB)
Junction Box	IP67
Mechanical Loading	5400Pa
Frame	Black Anodized Aluminium
Cables	4mm², 1000mm
Connector	MC4 or compatible
Glass	3,2mm

Temperature Ratings

Operating Temperature	-40°C - 85°C
Nominal Operating Cell Temp	47 +/- 2°C

Authorized Dealer



CAUTION: Read safety installations instructions before using the product
JNLSolar All rights reserved. Specifications included in this datasheet are subject
to change whitouth notice.


Temperature Coefficient

NOCT	47 +/- 2°C
Temp. Coefficient Isc (TK Isc)	0,06%/°C
Temp. Coefficient Voc (TK Voc)	- 0,34%/°C
Temp. Coefficient Power (TK Voc)	- 0,42%/°C

Warranties and Certifications

Certifications	IEC61215
Certifications	IEC61730
Product Warranty	15 years
Performance Warranty	25 years*

*Linear degradation
92,6% after 10 years - 86% after 25 years

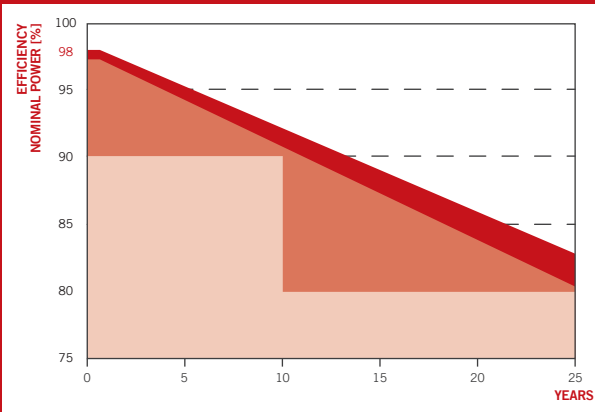

Packaging

Pieces per Pallet	30
Pieces per container 40' HQ	840
Pallets per container 40' HQ	28

